

MIDGET, SPF (5AG) FUSE HOLDER


- Designed for SPF (Solar Protection Fuse)
- Optional cover will protect and insulate fuse
- Flame resistant

SPECIFICATIONS

Base & Cover: Nylon 46, UL Rated 94V-0 **UL Rated:** 30 Amps @ 500 VAC
Clips: .030 (.76) Brass, Matte Tin Plate **UL Operating Temp. Range:** -58°F to +292°F (-50°C to +145°C)




3576 (THM)





Optional Cover **Cat. No. 3576C** fits Cat. No. 3576 & 3574

Mounting Detail



Mounting Detail



3574 (SMT)



CAT. NO. 3576 - Holder

CAT. NO. 3576C - Cover only

CAT. NO. 3574 - Holder

CAT. NO. 3576C - Cover only



3AG FUSE BLOCKS

- Available with fiberglass or phenolic base
- Fuse clips riveted to base for rugged applications

SPECIFICATIONS


Phenolic Base: XP, Black UL Rated 94-HB
Fiberglass Base: GPO-3 UL Rated 94 V-0
Clips: .020 (.51) Brass - Nickel Plated
Rated: 15 Amps @ 500 VAC
Operating Temp. Range: -58°F to +292°F (-50°C to +145°C)

BLACK PHENOLIC	FIBER-GLASS	HOLDS NO. OF FUSES	W
CAT. NO. 3536*	CAT. NO. 3540*	1	.500 (12.7)
3537*	3541*	2	1.125 (28.6)
3538*	3542*	3	1.750 (44.5)
3539*	3543*	4	2.375 (60.3)

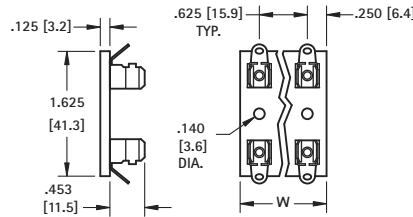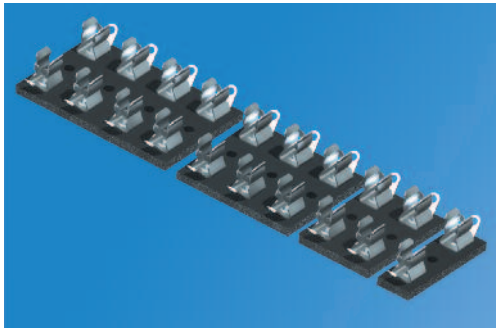

FUSE COVERS

- Made from flame retardant material
- Protects fuse from shorting and minor bumps



MATERIAL: PVC, UL Listed 94V-0



CAT. NO.	FUSE SIZE	L	W	H
3527C	5mm x 20mm	.945 (24.0)	.314 (8.0)	.512 (13.0)
3521C	2AG	.787 (20.0)	.295 (7.5)	.452 (11.5)
4245C	3AG	1.319 (33.5)	.472 (12.0)	.591 (15.0)



Can be used with clips 3512, 3512P, 3517 and 3518

MATERIAL: ABS, UL Rated 94V-0

CAT. NO.	FUSE SIZE
3517C	5mm x 20mm



Can be used with clips or fuse holders

SUBMINIATURE FUSE HOLDERS

- Reliable spring tension assures low contact resistance
- Fuse holders allow for quick changing of subminiature fuses
- Ideal for high density circuit board applications

SPECIFICATIONS


Base: Thermoplastic, UL Rated 94V-0
Springs: Beryllium Copper, Gold Plate

Pins: Brass, Tin Plate
Current Rating: 5 Amps @ 250V AC




.335 (8.5) x .158 (4.0) FUSE

For Littelfuse 392/395 Type TE5®
 Bussmann: PC Series
 or equivalent




.335 (8.5) DIA. FUSE


For Littelfuse 370 Type TR5®
 Bussmann: BK-EFF series
 or equivalent




CAT. NO. 3552*



CAT. NO. 3553*

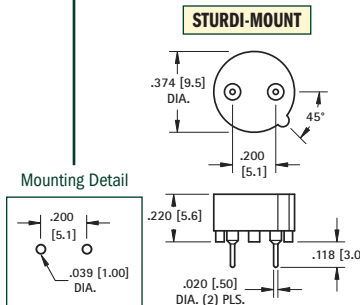

CAT. NO. 3556*



CAT. NO. 3554*

*3AG Fuse Blocks & Subminiature Fuse Holders are not UL recognized