

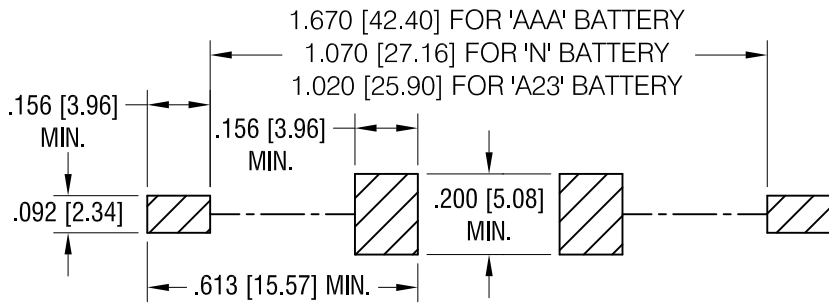


MOUNTING PAD LAYOUT. REQUIRED SPACING FOR 'AAA', 'N', 'A23' BATTERIES

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

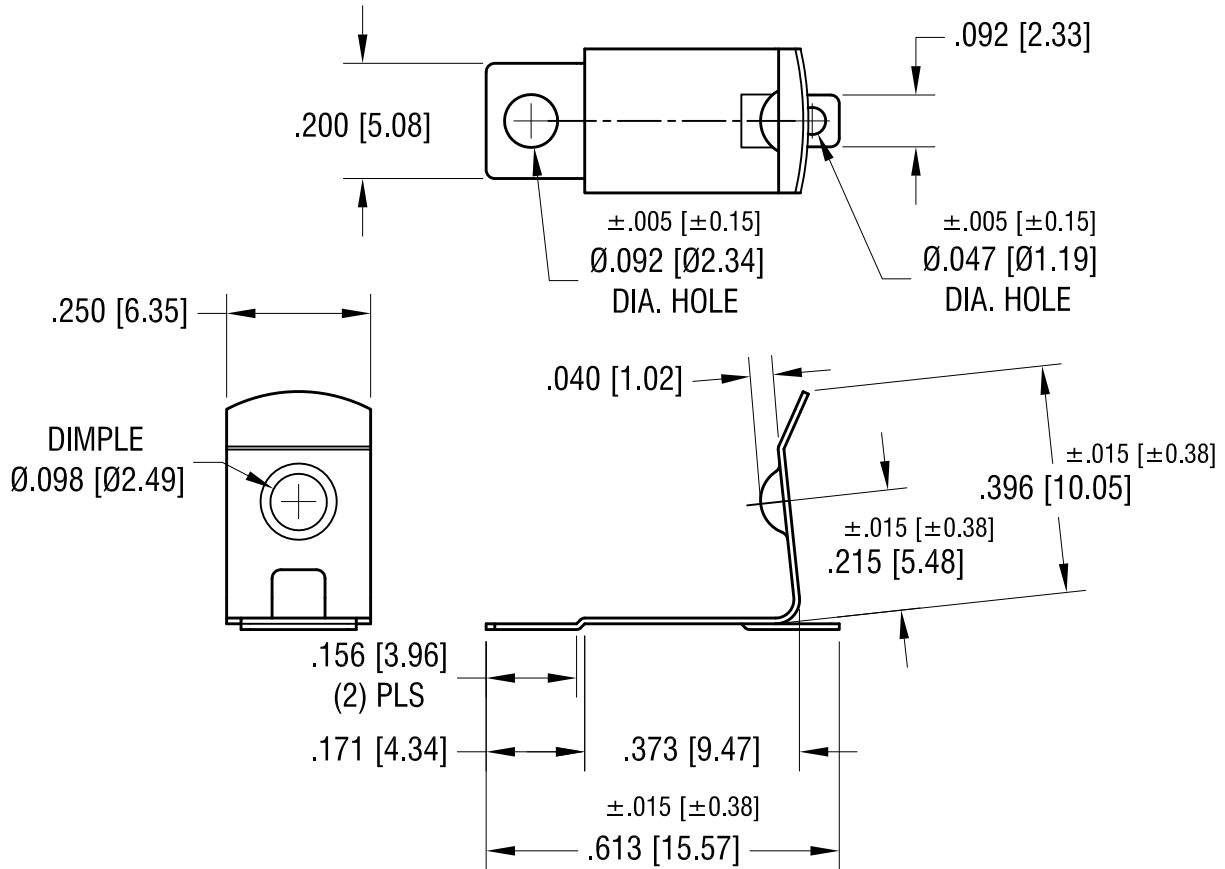

ACTUAL SIZE



NOTE:

- HEAT TREAT TO SPRING TEMPER.

7.15.24	NO CHANGES TO PART.	C
8.07.23	CHANGE AS PER ECN 23-134	B
5.31.17	CHANGE AS PER ECR 17-031	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.		
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500		
PART NAME		
'AAA' SMT BATTERY CLIP		
MATERIAL		
.010 [0.25] ANNEALED SPRING STEEL		
FINISH		DRN BY
MATTE TIN PLATE		NT
		DATE
		8.10.09
		APP'D
		MR
		SCALE
		3X
TOLERANCES	INCH [MM]	CODE
DECIMAL	±.010 [±0.25]	C
ANGULAR	± 1°	
UNLESS OTHERWISE SPECIFIED		
DWG NO.		556