




PC BUTTON & SPRING CONTACTS

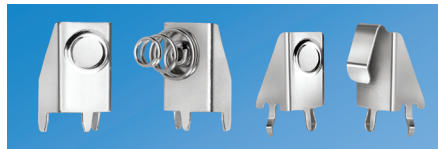

- Space saving design installs directly onto the PC board
- Suitable for .062 (1.57) to .093 (2.36) PC boards
- Reliable spring tension assures low contact resistance
- Ideal for self-contained battery compartments

Operating Temperature: -50°F to 185°F (-45°C to 85°C)




Refer to page 40 for Battery Contact Layout & Mounting Details

COIL SPRING

"AA" • "CR2" • "A"


(+) POSITIVE BUTTON



MATERIAL:
Frame: .015 (.38)
Steel, Tin-Nickel Plate

CAT. NO. 595

(-) NEGATIVE SPRING




MATERIAL:
Frame: .015 (.38) Steel,
Matte Tin Plate

CAT. NO. 628

"AAA" • "N" • "A23"


(+) POSITIVE BUTTON



MATERIAL:
Frame: .015 (.38) Steel,
Tin-Nickel Plate

CAT. NO. 637

(-) NEGATIVE SPRING




MATERIAL:
Frame: .015 (.38)
Steel, Matte Tin Plate

CAT. NO. 629


LEAF SPRING

MATERIAL: .012 (.30) Spring Steel, Tin-Nickel Plate

"AA" • "CR2" • "A"




CAT. NO. 596




CAT. NO. 590

MATERIAL: .010 (.25) Spring Steel, Tin-Nickel Plate

"AAA" • "N" • "A23"



CAT. NO. 597



CAT. NO. 591


SURFACE MOUNT LEAF SPRING CONTACTS

AVAILABLE ON TAPE AND REEL


- Economical & reliable contacts are ideal for surface mount applications
- Unique spring tension contacts adjust to variations in battery length
- Reliable spring tension contacts assure low contact resistance
- SMT solder tail with "flow-hole" design for increased joint strength

Operating Temperature: -50°F to 185°F (-45°C to 85°C)

Refer to page 39 for Battery Contact Layout & Mounting Details

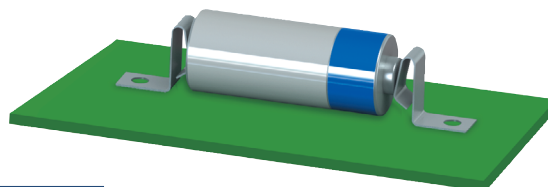

"AAA" • "AAAA" • "A23" • "A27" • "N"




MATERIAL: .010 (.25) Spring Steel

TIN-NICKEL PLATE	MATTE TIN PLATE
CAT. NO. ON TAPE	CAT. NO. ON TAPE
BULK & REEL	BULK & REEL
5230	5230TR
5230R	5230TR
5330	5330TR
5330R	5330TR

Tape and Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (400 pieces per reel)

"AA" • "CR2" • "A" • "9V"



MATERIAL: .010 (.25) Spring Steel

TIN-NICKEL PLATE	MATTE TIN PLATE
CAT. NO. ON TAPE	CAT. NO. ON TAPE
BULK & REEL	BULK & REEL
5231	5231TR
5231R	5231TR
5331	5331TR
5331R	5331TR

Tape and Reel Spec's: 32mm wide; 16mm pitch; 13 inch reel (250 pieces per reel)