
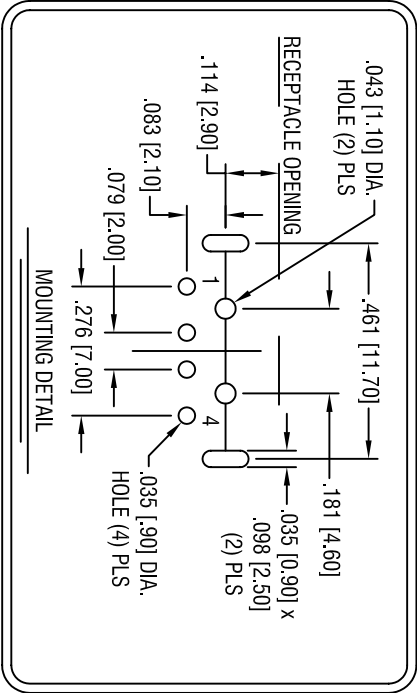
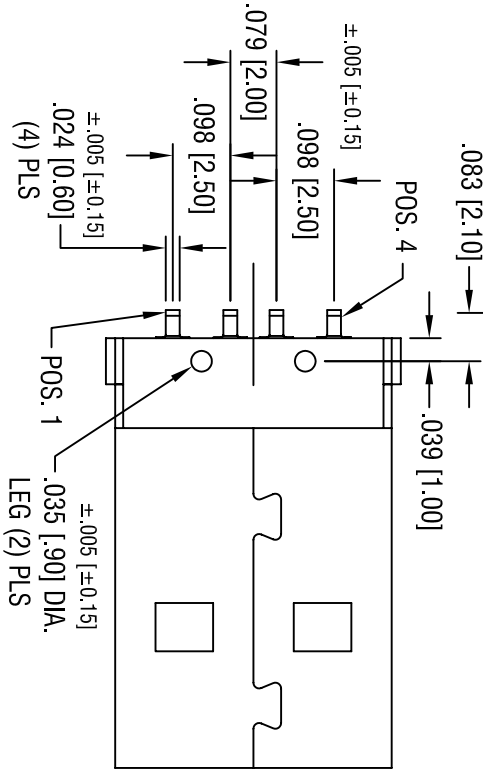


DATE	DESCRIPTION	REV.

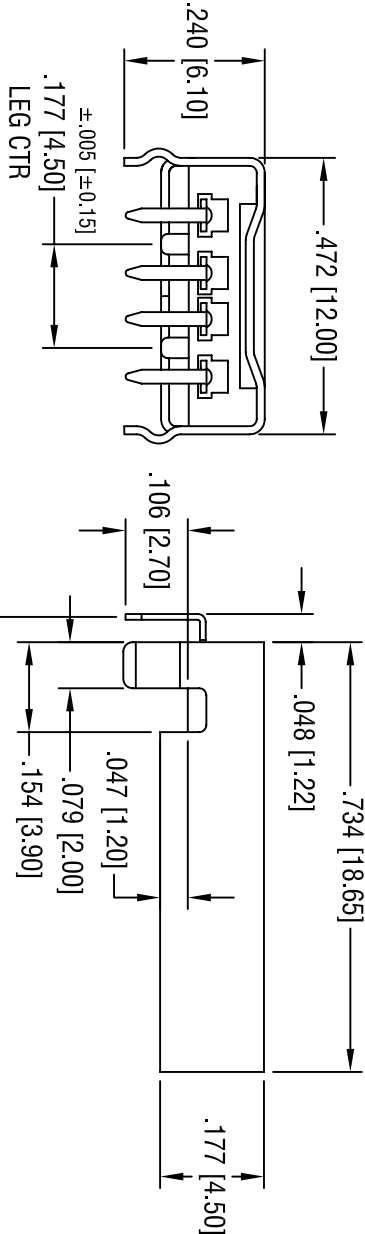

Notes:

Shell: Steel, Nickel Plate.

Insulator: Matl: Thermoplastic
UL 94V-0

Contacts: Matl: Phosphor Bronze
Finish: Gold Plate over
Nickel Plate on
Contact Area.
Tin Plate over
Nickel Plate
on Solder Tail.

Electrical Specifications
Rated Voltage:
30V AC (rms)

Contact Current Rating:
1A Max.

Contact Resistance:
30 milliohms Max.

Dielectric Withstanding:
500V AC

Operating Temperature:
-20°C to 85°C

KEYSTONE ELECTRONICS CORP.			
ASTORIA, N.Y. 11105-2017			
PART NAME			
USB A-TYPE HORIZONTAL PC PLUG			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		BOONE	6.13.06
TOLERANCES		APPD	SCALE
DECIMAL ± .010 [± 0.25]		LN	3X
ANGULAR ± 1°			
UNLESS OTHERWISE SPECIFIED		CODE	DWG NO.
C/M			932

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.